

32'' LED FHD Monitor

MW3232-V-K



Key Features

- Plastic casing, even lighter.
- Shield design effectively prevents electromagnetic radiation.
- New color management module delivers true-to-life colors.
- Ultra-narrow bezel, ultra-slim depth, light-weight and elegant.
- Wide 178° viewing angles allow viewing from almost any direction.
- Automatic detection of signal cable connection.
- Stable structural design, highly durable.
- Industrial-grade power module ensures stable and reliable operation, low power consumption, and long lifetime.
- Easy pedestal assembly/disassembly. Flexible wall mount and pedestal mount, saving space.


Specifications

Model	MW3232-V-K
Panel	
Panel type	LED backlight
Panel size	31.5 inches
Pixel pitch (mm)	0.363 (H) × 0.363 (V)
Resolution	1920 × 1080


Brightness (cd/m ²)	250
Contrast ratio	1200:1
Response time (ms)	6.5
Color support	16.7M
Viewing angle (H/V)	178°/178°
Active display size (mm)	698.4 (H) × 392.85 (V)
Interface	
Input	HDMI × 1, VGA × 1, Audio × 1
Speaker	
Speaker	2 × 2W
OSD	
Language	Polish; Finnish; Swedish; Dutch; Italian; German; Portuguese; Spanish; French; English; Japanese; Simplified Chinese; Traditional Chinese; Korean; Russian; Czech
VESA	
Wall mount hole (mm)	100 × 100
Wall mount screw	4-M3 screw holes, 4.5mm deep
General	
Power supply	AC 100 to 240V, 50/60Hz
Typical power consumption (W)	≤ 31.53
Standby power consumption (W)	< 0.5
Operating temperature	0°C to 50°C
Operating humidity	10% to 85% RH, non-condensing
Storage temperature	-20°C to 60°C
Storage humidity	10% to 90% RH, non-condensing
Product dimensions (W×H×D)(mm)	715 × 425 × 44
Package dimensions (W×H×D)(mm)	793 × 517 × 180
Weight (kg)	Net weight: 6.91 Gross weight: 8.4
Accessories	HDMI cable × 1, Power cable × 1, Adapter × 1, Quick guide × 1
Optional	Pedestal HB-5032-H, Wall mount HB-4022-E
*Note	*The specifications listed above may vary with device model

Appearance

Dimensions

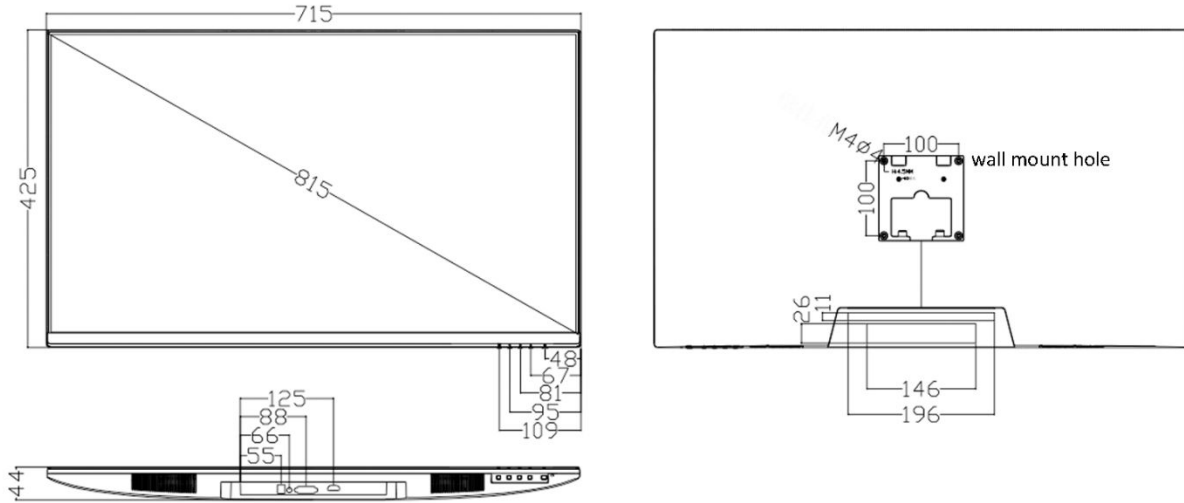

Interfaces

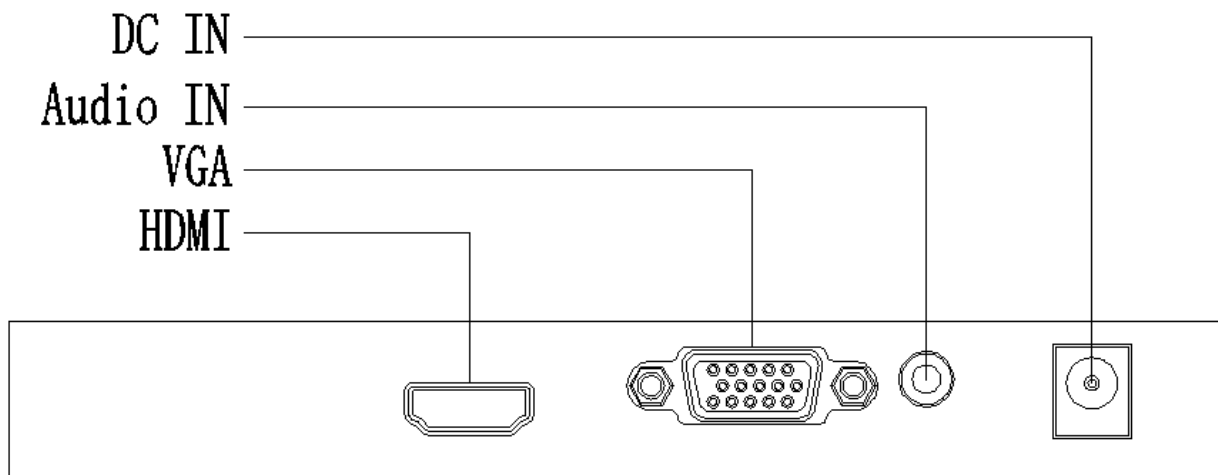

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.