

XVR301-G Series



Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable


Specifications

| Model | XVR301-04G | XVR301-08G |
|-------------------------------|--|---|
| Video/Audio Input | | |
| Analog Video Input | 4-ch, BNC | 8-ch, BNC |
| IP Video Input | 2-ch(only IP up to 6ch), each channel up to 4MP | 4-ch(only IP up to 8ch), each channel up to 4MP |
| Supported Analog Camera Types | Support AHD input: 5MP@20fps(The first channel) 5MP@12fps 4MP@30fps(The first channel) 4MP@15fps 1080P@30fps 720P@60fps Support TVI input: 5MP@20fps(The first channel) 5MP@12fps 4MP@30fps(The first channel) 4MP@15fps 1080P@30fps 720P@60fps | Support AHD input: 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps Support TVI input: 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps Support CVI input: 4MP@15fps 1080P@30fps 720P@30fps |

| | | |
|---------------------------|--|--|
| | Support CVI input: 5MP@20fps(The first channel) 4MP@30fps(The first channel) 4MP@15fps 1080P@30fps 720P@30fps Support CVBS input | Support CVBS input |
| Audio Input | 1-ch, RCA | |
| Video/Audio Output | | |
| VGA Output | 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz | |
| HDMI Output | 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz | |
| Audio Output | 1-ch, RCA | |
| Synchronous Playback | 4-ch | 8-ch |
| Two-way Audio | 1-ch, RCA | |
| Network | | |
| Incoming Bandwidth | 24Mbps | 40Mbps |
| Outgoing Bandwidth | 48Mbps | 60Mbps |
| Remote Users | 128 | |
| Protocols | TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE | |
| Encoding | | |
| Recording Resolution | 5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF | |
| Recording Frame Rate | Main stream: 5MP Lite@12fps 4MP Lite@15fps 1080P Lite@15fps 1080P@15fps 720P@30fps Sub stream: D1@30fps(Max) | Main stream: 5MP Lite@6fps 4MP Lite@8fps 1080P Lite@15fps 1080P@8fps 720P@15fps Sub stream: D1@15fps(Max) |
| Hard Disk | | |
| SATA | 1 SATA interface | |
| Capacity | Up to 6TB for each HDD | |
| External Interface | | |
| Network | 1 RJ45 10M/100M self-adaptive Ethernet Interface | |


| | |
|------------------------|--|
| Interface | |
| USB Interface | Rear panel: 2 x USB2.0 |
| General | |
| Power Supply | 12V DC Power Consumption: ≤ 8 W(without HDD) |
| Working Environment | -10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing) |
| Dimensions(W×D×H) | 260mm ×240mm× 46mm (10.2" × 9.4"×1.8") |
| Weight (without HDD) | ≤1.1 Kg (2.42lb) |

Dimensions

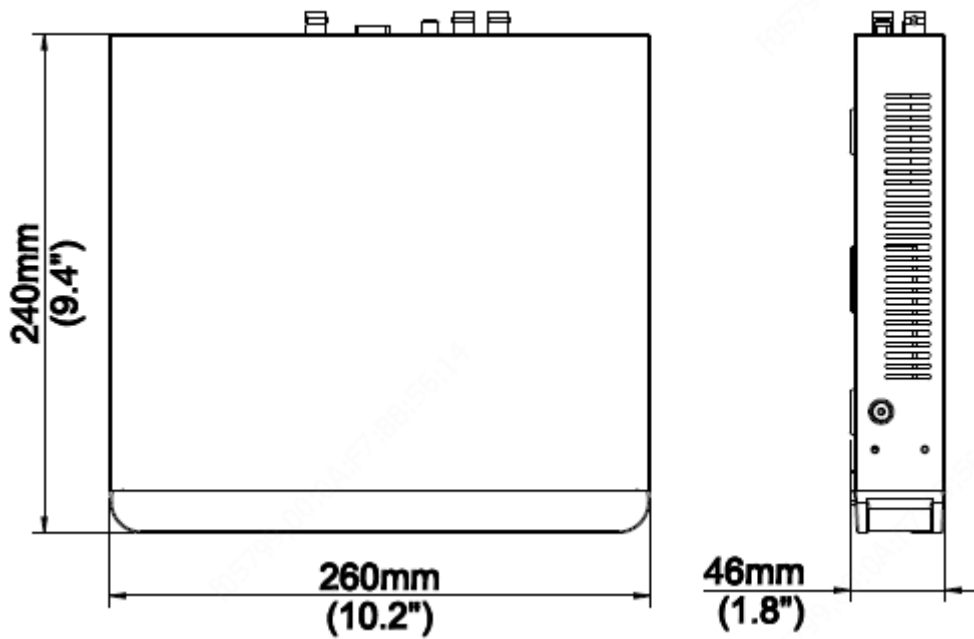

Rear Panel

Take XVR301-04G for example

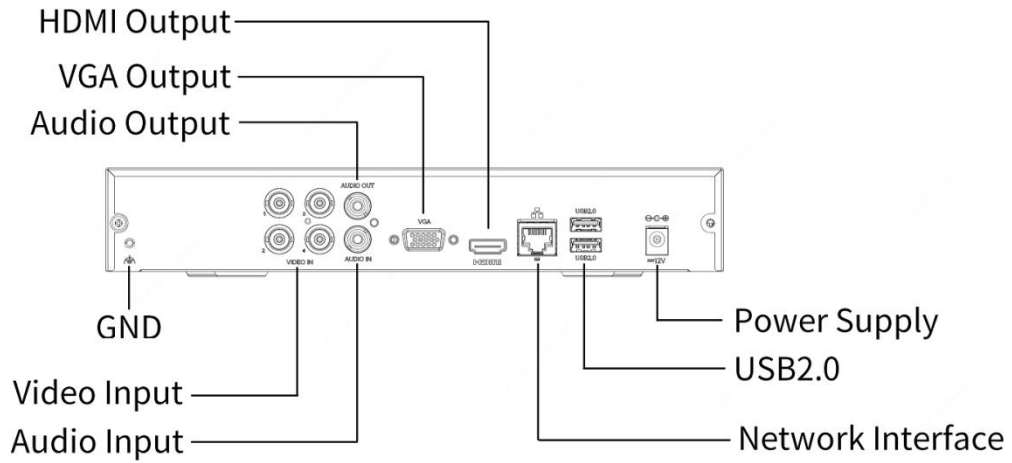

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.