


# HID Aero™ X200 Input Monitor Interface Module

Monitoring up to sixteen general purpose inputs

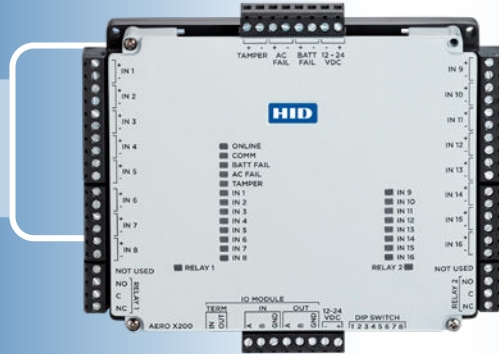

## INPUT MONITOR INTERFACE MODULE SUPPORTING UP TO 16 GENERAL PURPOSE INPUTS

### Key Features

- **Custom Rules Processing**  
Use X200 in conjunction with custom rules engine on X1100 to create elaborate rules for handling input states
- **Supervised/Unsupervised**  
Inputs Supervised inputs can support custom A-to-D conversion
- **VertX V200 Replacement**  
Form/fit replacement
- **IO Module Encryption**  
Enhance security between intelligent controller and IO modules with AES encryption
- **Crypto Chips**  
Protect against malicious attacks to keep keys and passwords safe
- **Threat Levels**  
Define up to 7 different threat levels that are used to instantaneously adjust user access during lockdowns and lockouts
- **Mounting**  
Physically mount to DIN rails using accessory (sold separately)

- **Open Architecture** - Work with a variety of software partners over time without any re-investment in hardware
- **Based on HID Mercury Technology** - Built on a tried and tested platform, operating in the most demanding access control enterprises for 25+ years
- **DIN Rail Mountable** - Use mounting accessory (sold separately) to easily attach housing to mechanical DIN rails
- **Easy to Understand LED Status Lights** - Status lights representing power, heartbeat, online/offline status, reader status, input status and relay status

The HID Aero Controller product line provides a complete and fully functional hardware, firmware, software library and tool infrastructure for access control software providers. This product line is ideal for access control providers who do not want to incur the ongoing costs of designing, manufacturing and maintaining panel hardware along with the critical access control logic that commonly resides locally in access control panels. The HID Aero Controller product line is the successor to HID's VertX® and EDGE®, and is based on HID Mercury technology, a panel technology supporting 4 million+ panels installed globally since the early 1990s.

The HID Aero X200 provides on-board IO support for up to sixteen general purpose inputs (supervised or unsupervised) and two general purpose outputs. All supervised inputs support analog-to-digital conversion.

Attach the X200 to an X1100 intelligent controller to perform full input monitor processing or attach multiple X200s to monitor more inputs.

The X200 serves as a form and fit replacement for the VertX V200.

## INTELLIGENT CONTROLLER & IO MODULE SYSTEM FEATURES

### Highly Configurable

- Change reader modes based on time thresholds, pre-alarm signals, for the benefits of functionality like a global lockdown
- Enable access rights or alerts for specific groups of users
- Create unique situational emergency alerts using highly detailed transaction information and data correlation features

### Sophisticated Threat Detection

- Duress signaled from keypad readers will notify the host for immediate action and

quick response in emergency situations

- Offline protection against improper card usage via local anti-passback capability
- Ability to monitor supervised input wiring to help identify system faults or malicious attacks

### Platform Security

- Encryption of data at rest provides privacy for data on the intelligent controller
- Monitor the health of the intelligent controller on the network by utilizing SNMPv3

- Ensure rogue devices cannot be plugged into the network by using 802.1X to implement port based network access control

### Hardware Design

- The HID Aero X1100 combines the capability of the legacy V1000 and V2000 enabling a simpler approach to installation - one SKU covers both use cases!
- Market leading maximum operating temperature allows for installation in harsh environments

## SPECIFICATIONS

<b>Input Voltage</b>	12 to 24 Vdc +/- 10%
<b>Maximum Input Current</b>	300 mA
<b>Intelligent Controller Communication</b>	2-wire RS-485, 2400 to 115K BPS, asynchronous
<b>Inputs</b>	19 supervised/unsupervised, standard EOL: 1k/1kΩ 1%, 1/4 watt
<b>Outputs</b>	2 Relays, Form-C with dry contacts, non-latching
<b>Relay Contact Rating</b>	2 A @ 30 Vdc resistive
<b>Operating Temperature</b>	32 to 158 °F (0 to 70 °C)
<b>Humidity</b>	5 to 85% RHNC
<b>Storage Temperature</b>	-67 to +185 °F (-55 to +85 °C)
<b>Dimension</b>	6.46" x 5.51" x 1.02" (164 mm x 140 mm x 26 mm)
<b>Weight</b>	326 g
<b>Certifications</b>	Certification: FCC Part 15 Subpart B, CE, BSMI, IC, AS/NZS, TCVN, KCC Safety: UL-294, IEC 62368-1, CB Scheme Hazardous Substances: RoHS (2011/65/EU & 2015/863), EU REACH (1907/2006), California Proposition 65
<b>HS Code</b>	9030.33.3
<b>ECCN</b>	EAR99



[hidglobal.com](http://hidglobal.com)

North America: +1 512 776 9000  
Toll Free: 1 800 237 7769  
Europe, Middle East, Africa: +44 1440 714 850  
Asia Pacific: +852 3160 9800  
Latin America: ++52 55 9171 1108

© 2020 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design, VertX, EDGE and HID Aero are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2020-03-20-pacs-aero-x200-controller-ds-en PLT-05024