



KEYSWITCHES

ACCESS CONTROL SWITCH PLATE

LEARN MORE



click or scan



DESCRIPTION

BEA's **KEYSWITCHES** offers an economical and efficient solution for controlling access in a variety of security applications. Each plate is furnished with both Philips and Spanner (tamper-resistant) screws.

These low-profile, aluminum plates are designed to withstand the rigors of busy environments, while providing an aesthetically pleasing and easy to install access control device.



Vandal-Resistant

Aluminum wall plate with tamper-resistant screws

Multiple Plate Sizes

Available in jamb and single wall plates or double gang combo-plate



Keyswitch Override

Combo plate allows for independent operation of the push plate and keyswitch, or allows the keyswitch to activate or disable the push plate

Selectable Power Consumption

Capable of switching 6A @ 124 VAC or 3A @ 250 VAC

APPLICATIONS




Access Control

TECHNICAL SPECIFICATIONS

Technology	Mechanical Key Access
Faceplate Dimensions	
Jamb	1 ¾" (W) x 4 ¾" (H) x ¼" (D)
Single	2 ½" (W) x 4 ¾" (H) x ¼" (D)
Combo-plate	4 ½" (W) x 4 ½" (H) x ¼" (D)
Visual Style	Combo-plate: Handicap symbol and "Push To Open" text
Materials	Aluminum wall plate with tamper-resistant screws
Switch Rating	6 A @ 125 VAC or 3 A @ 250 VAC
Mortise Cylinder*	1 ⅞" cylinder with straight cam required

*NOT INCLUDED – Requires part 10CYLINDERKA or 10CYLINDERKD

PRODUCT SERIES

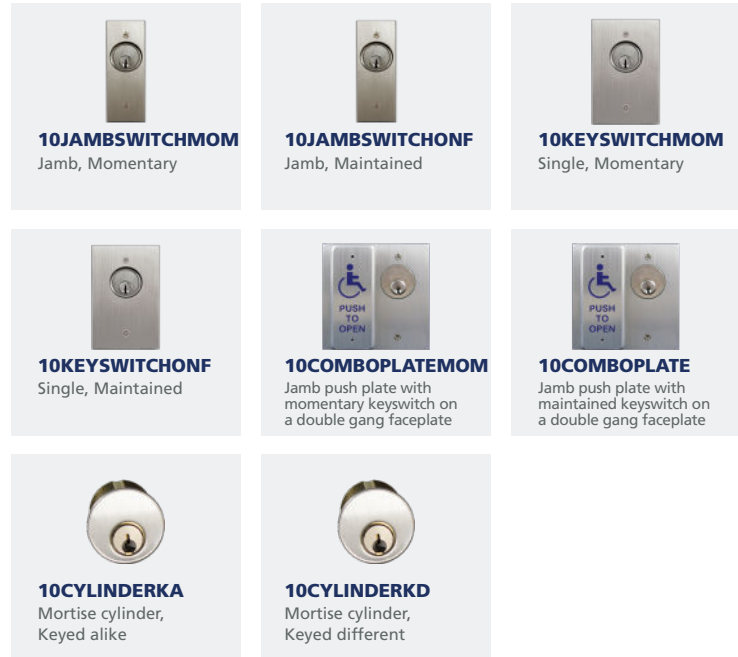

20.2021	ON / OFF Switch for 10KEYSWITCHONF and 10JAMBSWITCHONF
20.2020	Momentary Switch for 10KEYSWITCHMOM and 10JAMBSWITCHMOM
10BOXJAMBST	Surface-mount box for 10JAMBSWITCHMOM, 10JAMBSWITCHONF
10BOX24SGSM	Surface-mount box for 10KEYSWITCHMOM, 10KEYSWITCHONF
10BOXDGSM	Surface-mount box for 10COMBOPLATE, 10COMBOPLATEMOM

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.