



433 MHZ FAMILY

433 MHZ WIRELESS TRANSMITTERS
AND RECEIVERS



LEARN MORE



click or scan

TECHNOLOGY



CERTIFICATIONS



APPLICATIONS



Wireless Actuators



Limited Mobility

TECHNICAL SPECIFICATIONS

Frequency	433 MHz
Radio Control Type	Digital
Emitted Radio Power	-28.7 dBm (transmitter)
Power Consumption	3mA (transmitter); 30mA (receiver)
Power	
Hardwire	1 9-volt or 3-volt battery
Handheld	1 3-volt battery
Input Voltage	12 – 24 VAC / VDC (receiver)
Contact Rating	1.0 A @ 30 VDC 0.5 A @ 125 VAC 0.3 A @ 60 VDC
Operating Temperature	14 – 131 °F (-10 – 55 °C)
Capacity	100 programmed transmitters (per receiver)
LED Functionality	
Receiver/Transmitter Learn	Red
Relay Activity	Blue
Dimensions	
Receiver	2 1/8" (W) x 1" (H) x 2 3/4" (D)
Transmitter	1 3/8" (W) x 3/5" (H) x 2 3/4" (D)
Norm Conformity	CE, FCC, IC

PRODUCT SERIES



10RD433
433 MHz Receiver



10RD433EH
Extended hold
time receiver



10TD433HH1
One button transmitter



10TD433HH2
Two button transmitter



10TD433HH3
Three button transmitter



10TD433HH4
Four button transmitter




10TD433PB3V
One button, 3-volt
wired transmitter



10TD433PB9V
One button, 9-volt
wired transmitter

DIMENSIONS

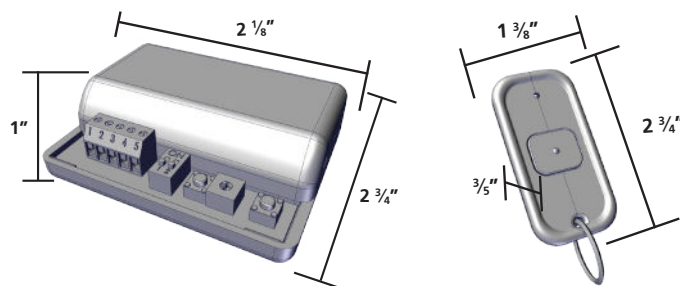

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company