













ANTENNAS | OMNI-785 SERIES

## OMNI-DIRECTIONAL, ROUTER/EQUIPMENT MOUNT WI-FI ANTENNA

2400 – 2500 MHz, 5000 – 7200 MHz, 4 dBi



					
2400 – 2500 MHz 5000 – 7200 MHz	4 dBi	Increase X Mb/s	Omni- Directional	2.4 – 2.5 GHz 5.0 – 7.2 GHz	Internet of Things
					
Machine to Machine	6.0 – 7.2 GHz	-40°C to +80°C	Fire Resistant	Chemical Protection	IP 55

APPLICATION AREAS



Urban & Rural



Commercial & Industrial

- Dual-band 2.4 GHz and 5 to 7.2 GHz Wi-Fi antenna
- Omni-directional antenna with medium gain
- Compliant with IEEE 802.11a/b/g/n/ac/ax wireless standards
- Highly portable with a quick and compact setup
- Direct router mount

### Product Overview

The OMNI-785 is an omni-directional, dual-band Wi-Fi antenna, which ensures a strong Wi-Fi connection with improved transfer speeds for your router or modem. The antenna provides dual-band Wi-Fi coverage in the 2.4 GHz and 5 to 7.2 GHz bands with a peak gain of 4 dBi across the bands, making it ideal for any Wi-Fi access point, whether it is using older Wi-Fi technology or new Wi-Fi technology that goes up to Wi-Fi 6E (7.2 GHz). The antenna is ground plane independent and can be fitted directly to any equipment that uses an RP-SMA connector. The antenna can therefore be used to resolve channel saturation and provide the ultimate Wi-Fi performance and flexibility. The knuckle base of the antenna allows multiple angle deployment to accommodate the orientation of the equipment.

### Features

- Dual-band Wi-Fi antenna for 2.4 GHz and 5-7.2 GHz
- Omni-directional antenna with medium gain
- Knuckle mount allows multiple angle deployment
- Antenna is ground plane independent
- Robust and lightweight design


### Application Areas

- On-the-go: Highly portable
- Poor data signal reception (indoor or outdoor)
- Slow or unstable data transmission connection
- Increase system transmission reliability
- M2M and IoT applications




**Frequency Bands**

The OMNI-785 is a Wi-Fi antenna that works from | 2400 – 2500 MHz | and | 5000 – 7200 MHz |

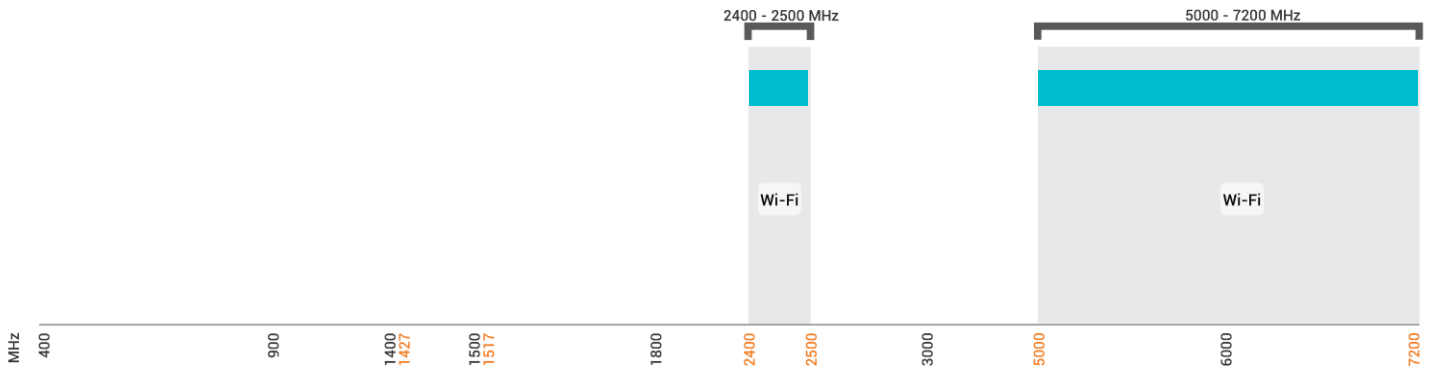

 Indicates the WI-FI bands on which OMNI-785 works

**Antenna Overview**

	
<b>Ports</b>	1
<b>SISO / MIMO</b>	SISO
<b>Frequency Bands</b>	2400 – 2500 MHz 5000 – 7200 MHz
<b>Polarisation</b>	Linear Vertical
<b>Peak Gain</b>	4 dBi
<b>Coax Cable Type</b>	N/A
<b>Coax Cable Length</b>	N/A
<b>Connector Type</b>	RPSMA (M)

*\*The connector is factory mounted to the antenna*

### Electrical Specifications

Frequency Bands:	2400 – 2500 MHz 5000 – 7200 MHz
Gain (Max):	2 dBi @ 2400 – 2500 MHz 4 dBi @ 5000 – 7200 MHz
VSWR:	<2.5:1
Feed Power Handling:	10 W
Input Impedance:	50 Ohm (nominal)
Polarisation:	Linear Vertical
DC Short:	Yes

### Product Box Contents

Antenna:	A-OMNI-0785-V1-01
Mounting Bracket:	N/A

### Ordering Information

Commercial Name:	OMNI-785
Order Product Code:	A-OMNI-0785-V1-01
EAN Number:	6009710923405

### Mechanical Specifications

Product Dimensions	209 mm x 31 mm x Ø13 mm
Packaged Dimensions	250 mm x 45 mm x 16 mm
Weight	0.04 kg
Packaged Weight	0.04 kg
Radome Material:	ABS (Halogen Free)
Radome Colour:	Black
Mounting Type:	Screw-on


### Environmental Specifications, Certification & Approvals

Wind Survival:	Indoor
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Indoor
Water Ingress Protection Ratio/Standard:	IP 55
Salt Spray:	MIL-STD 810G/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Enclosure Flammability Rating:	UL 94-HB
Impact Resistance:	IK 05
Product Safety & Environmental:	Complies with CE and RoHS standards




**Antenna Performance Plots**

**VSWR**

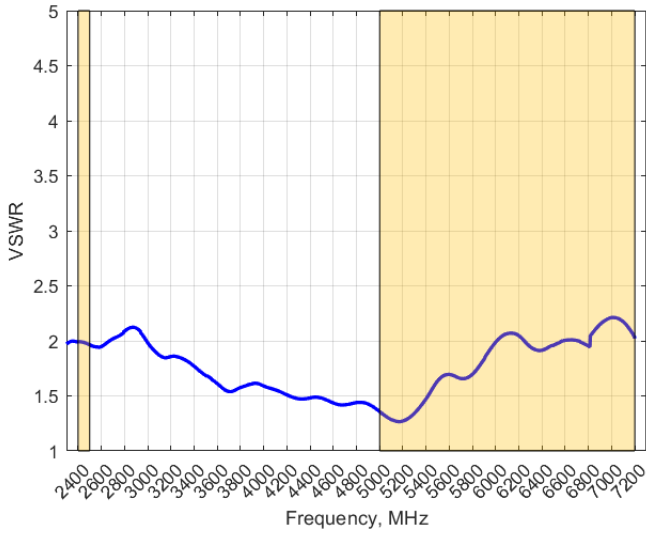

**GAIN (EXCLUDING CABLE LOSS)**

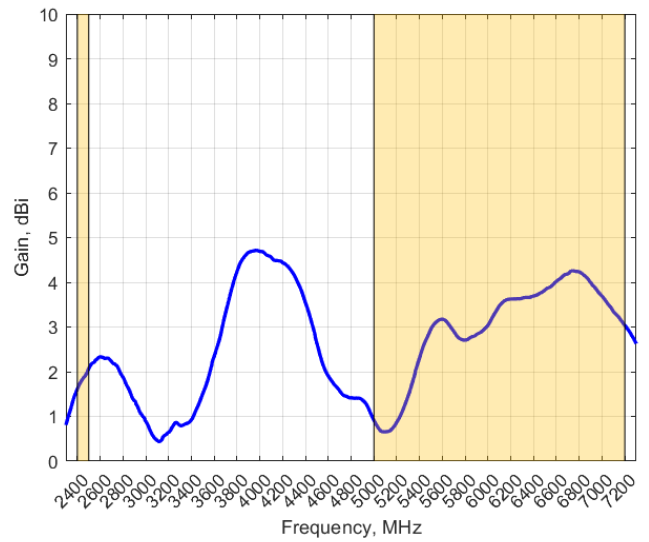

**Voltage Standing Wave Ratio (VSWR)\***

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-785 delivers superior performance across all bands with a VSWR of <2.5:1.

\*VSWR measured without a cable


**Gain\* in dBi**

4 dBi is the peak gain from 2400 – 2500 MHz and 5000 – 7200 MHz

Gain @ 2400 – 2500 MHz:	2 dBi
Gain @ 5000 – 7200 MHz:	4 dBi


\*Antenna gain measured with polarisation aligned standard antenna

**Technical Drawings**

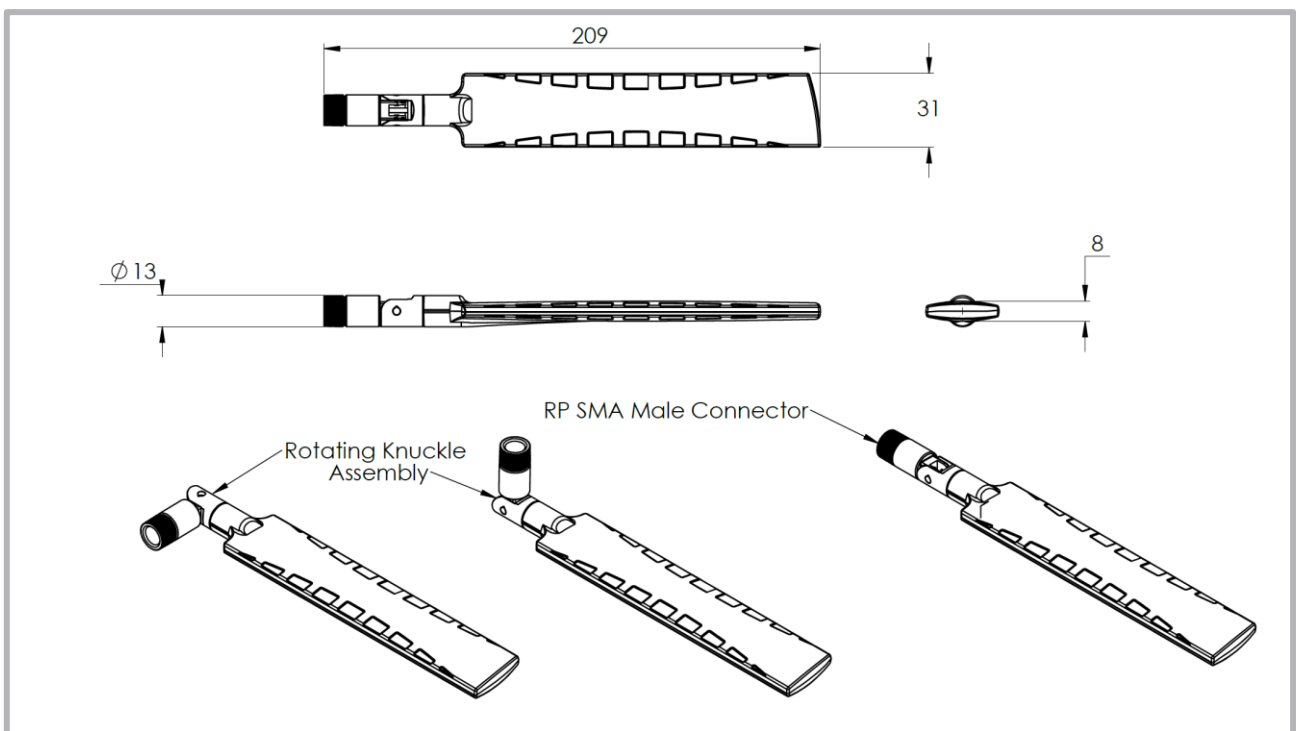


Radiation Patterns


Azimuth: 2400 – 2500 MHz

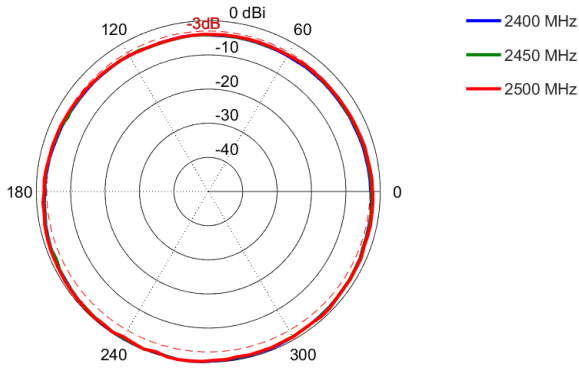


Elevation: 2400 – 2500 MHz

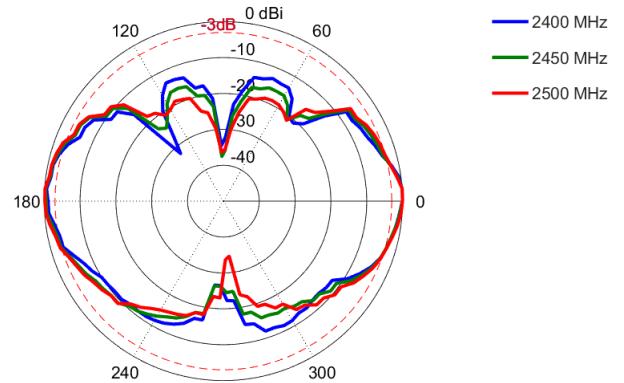


Azimuth: 5000 – 6000 MHz

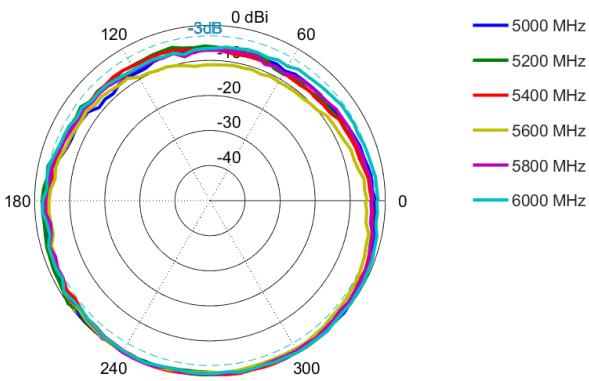


Elevation: 5000 – 6000 MHz

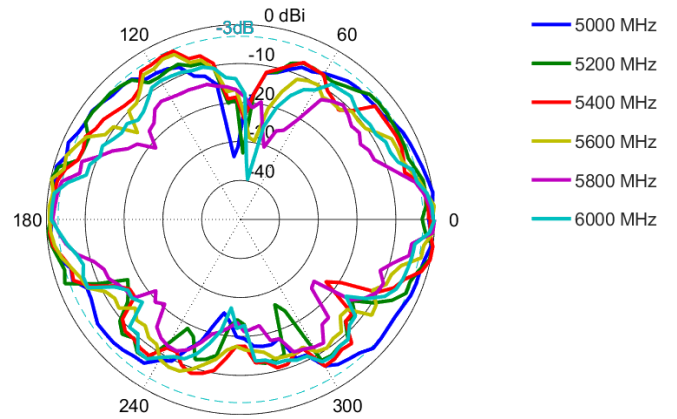

Azimuth: 6000 – 7200 MHz

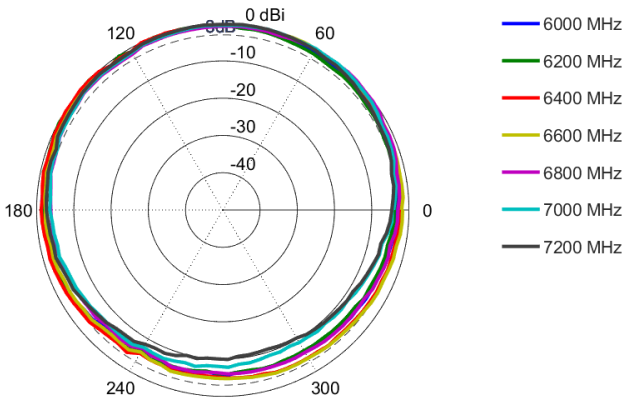


Elevation: 6000 – 7200 MHz

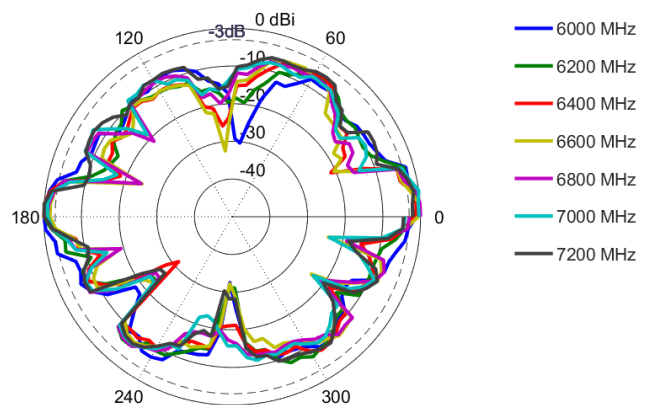

---

## Additional Accessories

No additional accessories required.



---

## CONTACT POYNTING

### Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park,  
Landmarks Avenue,  
Samrand, 0157, South Africa

**Phone:** +27 (0) 12 657 0050

**E-mail:** [info@poynting.tech](mailto:info@poynting.tech)

**International Email:** [sales-global@poynting.tech](mailto:sales-global@poynting.tech)

### Poynting Europe

Regus Business Center Neue Messe Riem  
Kronstadter Straße 4  
81677 München  
Germany

**Phone:** +49 89 7453 9002

**E-mail:** [sales-europe@poynting.tech](mailto:sales-europe@poynting.tech)

### Poynting USA

1804 Owen Court, Suite 104,  
Mansfield,  
TX 76063  
USA

**Phone:** +1 817 533-8130

**E-mail:** [sales-us@poynting.tech](mailto:sales-us@poynting.tech)