



EVAC-19B (NA) Specifications

Accelerating mass adoption of electric vehicles by delivering sustainable EV charging solutions that can be deployed anywhere



EVAC-19B (NA)

19.2 kW AC Level 2 Charger


FEATURES

- Designed for easy installation and maintenance
- Level 2 (AC) EV charging station
- 208/240 VAC, single-phase input
- 80 A output current
- SAE J1772 Type 1 connector
- NEMA 3R rated design ideal for outdoor installation
- Wall-mounted or floor mounted with a pedestal
- Hard wired
- Energy Star compliant



| | | \sim | NS I | I A I | \sim |
|-----|--------------|--------|--------|-------|--------|
| ЭΙΝ | $n \vdash n$ | | \sim | IIXI | ιн |
| | | | | | |

| SPECIFICATIONS | | | |
|-----------------------|---|--|--|
| Connector Type | SAE J1772 Type 1 | | |
| Output Power | 19.2 kW | | |
| Output AC Current | 80 A (single phase) | | |
| Supply Input | 208 / 240 VAC single phase (+/- 10%) | | |
| Supply Frequency | 60 Hz | | |
| Wiring Type | Hard wired | | |
| Indicators | LED with multi-colors | | |
| Charging Cable Length | 25 ft. | | |
| Operating Temperature | -22°F (-30°C) to 122°F (50°C) | | |
| IP Rating / IK Rating | NEMA 3R / IK10 | | |
| Standards | UL 50/991/1449/1998/2231/2594, FCC Part 15B, Energy Star | | |
| Mounting | Wall or floor mounted using a pedestal | | |
| Installation Types | Residential | | |
| Start Mode | Plug and play | | |
| Warrantyt | 2 year standard | | |

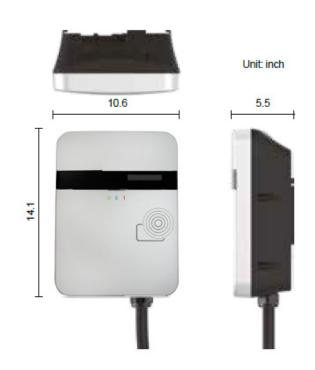



EVESCO
(PART OF POWER SONIC CORP.)
NA, LATAM & APAC
365 Cabela Dr Suite 300,
Reno, Nevada 89439
USA

T: +1 775 824 6500

Smitspol 4, 3861 RS,
Nijkerk
The Netherlands
T: +31 33 7410 700