

UNV-Link Pro connect Box


GCB01-B7



Specifications

Interface	Description
Network	4 x RJ45 10M/100M Base-TX EthernetNetwork Port 1 Support POE (IEEE802.3af) OutputNetwork Port 4 Support PSE Voltage Test
Voltage Test	1 x PSE Voltage Test(PSE voltage detection Range: 1V~56V; IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt) 1 x DC voltage Test(DC voltage detection Range: 1V~56V)
Network	Description
Wi-Fi	2.4G Wi-Fi (IEEE802.11b/g/n)
Structure / Environment	Description
Battery Capacity	18650 lithium battery, 7500mAH
Power Input	1 x DC 5V/2A max, type-c
Power Output	1 x DC 12 V/1 A output; 1 x DC 5 V/1 A output, type-A
General	Description
LED Indicator	System indicator, WiFi indicator, Battery indicator
Dimensions	130 × 85 × 33mm (5.1" × 3.3" × 1.3") (L x W x H)
Working Environment	-20 °C ~ 60 °C (-4 °F ~ 140 °F), Humidity: ≤95% RH (non-condensing)
Reset Button	Support

Dimensions

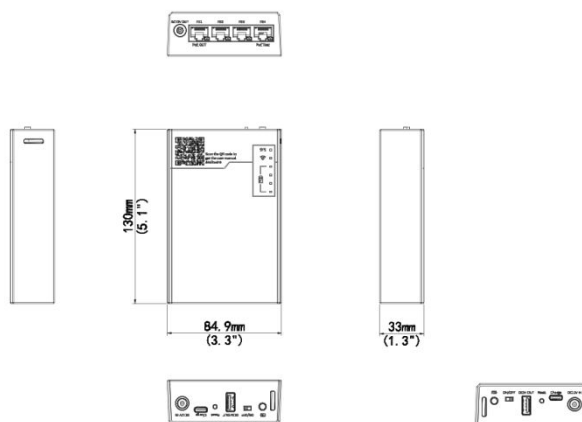

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.