



PANTHER FAMILY

PUSH PLATES WITH INTEGRATED WIRELESS TECHNOLOGY



LEARN MORE



Click or scan

TECHNOLOGY



CERTIFICATIONS



DESCRIPTION

BEA's **PANTHER FAMILY** consists of **900 MHZ** or **433 MHZ** wireless technology integrated into **6 INCH ROUND**, **4.75 INCH ROUND** and **4.75 INCH SQUARE PUSH PLATES**.

With an integrated wireless transmitter and mounting box, the **PANTHER FAMILY** reduces installation time by eliminating the need to run wires from the push plate or use additional mounting hardware.

This offers greater mounting flexibility in areas where hardwired push plates cannot be mounted.

*Corresponding wireless receiver sold separately




Wireless Compatibility

Reduces installation time by eliminating the need to run wires from the push plate or use additional mounting hardware

Vandal Resistant

Concealed fasteners minimize vandalism

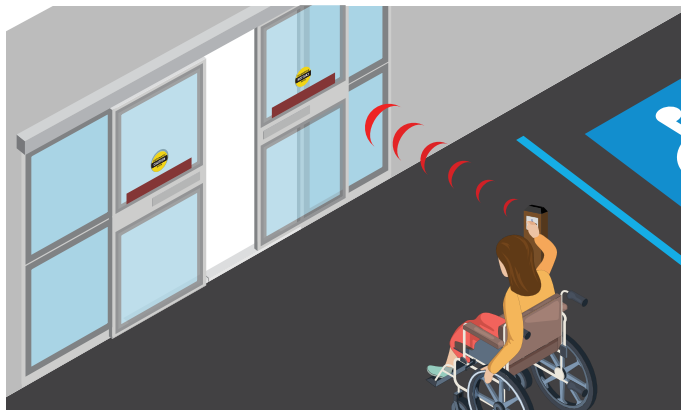

Weather-Rated

IP65 rated housing creates a weather resistant barrier that enables the push plates to be mounted in outdoor environments or wash-down applications

Enhanced Accessibility

Offers a means of activation of automatic doors for those with limited mobility or disabilities








TECHNICAL SPECIFICATIONS

Dimensions	
6" Round	6 1/3" (ø) × 1 9/20" (D)
4.75" Round	5 3/25" (ø) × 1 21/50" (D)
4.75" Square	5 3/25" (W) × 5 3/25" (H) × 1 21/50" (D)
Weight	
6" Round	1.2 lbs
4.75" Round	1.14 lbs
4.75" Square	1.04 lbs
Mounting Options	
Surface or bollard mount	
Transmitter Frequency	
433 MHz or 900 MHz	
Power	
433 MHz	(1) 12 V Type A23
900 MHz	(2) CR2032
Material	
Faceplate	16 Gauge, 304 2B Stainless Steel
Housing	ABS Plastic
Degree of Protection	
IP65 FCC IC Part 15 Approved	

*Corresponding frequency receiver required

**See 433 MHz and 900 MHz User's Guides for more information on BEA's wireless transmitters and receivers

PRODUCT SERIES

		
10EMR61 6" Round - 433 MHz Text & Logo	10EMR6L 6" Round - 433 MHz Logo only	10EMR6 6" Round - 433 MHz Text only
		
10EMR4751 4.75" Round - 433 MHz Text & Logo	10EMR475L 4.75" Round - 433 MHz Logo only	10EMR475 4.75" Round - 433 MHz Text only
		
10EMS4751 4.75" Square - 433 MHz Text & Logo	10EMS475L 4.75" Square - 433 MHz Logo only	10EMS475 4.75" Square - 433 MHz Text only
		
10EMR61-900 6" Round - 900 MHz Text & Logo	10EMR6L-900 6" Round - 900 MHz Logo only	10EMR6-900 6" Round - 900 MHz Text only
		
10EMR4751-900 4.75" Round - 900 MHz Text & Logo	10EMR475L-900 4.75" Round - 900 MHz Logo only	10EMR475-900 4.75" Round - 900 MHz Text only
		
10EMS4751-900 4.75" Square - 900 MHz Text & Logo	10EMS475L-900 4.75" Square - 900 MHz Logo only	10EMS475-900 4.75" Square - 900 MHz Text only
15.5039	Space PCB for PANTHER plate - 433 series	
15.5142	Space PCB for PANTHER plate - 900 series	
10RD433	433 MHz receiver	
10RD900	900 MHz receiver	

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
 T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company